


Changing Settings on the Magcell/MagII units

The Magtouch online system can be used with most standard GPRS providers. This document explains how to set this up.

Most older Magcell units and all the new MagII units can be changed by sending the unit an SMS as follows

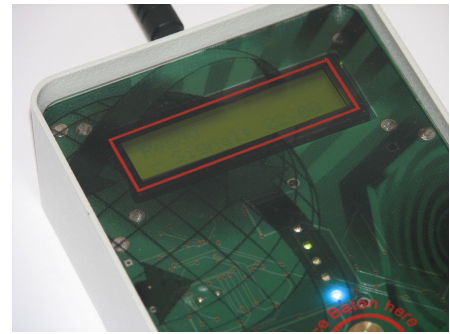

Magcell:ID:*URL:*Username:*Password:*APN:*DHCP:*Port:*Path:*IA:



Magcell is case sensitive.
ID is the 6 digit Magcell ID

Any field which starts with an * will remain unchanged, any fields which are blank will be deleted, otherwise whatever is typed in the field will be stored as the new configuration.

The unit call button must be pressed and the unit switched on at the same time.

An SMS reply containing the current settings will be sent back to confirm the configuration has taken place.

If the word Magcell is not there, the ID doesn't match, the number of fields doesn't match or any field is invalid, (too long), then the SMS will be discarded.

Examples

To change a unit with ID 123456 from www.onlineguarding.com to www.onlineguarding.co.za send it an sms with

```
Magcell:123456:www.onlineguarding.co.za:*:*:*:*:*:
```

To change a unit with ID 678901 from the South african service provider to Max Online Austria with the following details.

APN : gprsinternet

username : gprs

password : [blank]

dhcp : 213.162.64.1

send it an sms with

```
Magcell:678901:*:gprs:gprsinternet:213.162.64.1:*:*:
```

Older Unit setup

If your unit does not accept the SMS it is probably an older unit which does not use the SMS feature. To change its setting you will need a special cable from Magtouch Electronics. You will also be supplied with the driver software and a Terminal program for the settings. Please see the special cable setup documentation regarding this